


MEDINA COUNTY ENGINEERING CENTER
791 W. SMITH ROAD
P.O. BOX 825
MEDINA, OHIO 44258-0825
(330) 723-9561

MEDINA COUNTY ENGINEER

Mike Salay, P.E., P.S.

MEDINA COUNTY HIGHWAY GARAGE
6100 WEDGEWOOD ROAD
MEDINA, OHIO 44256
Ph. (330) 764-8780

COPY

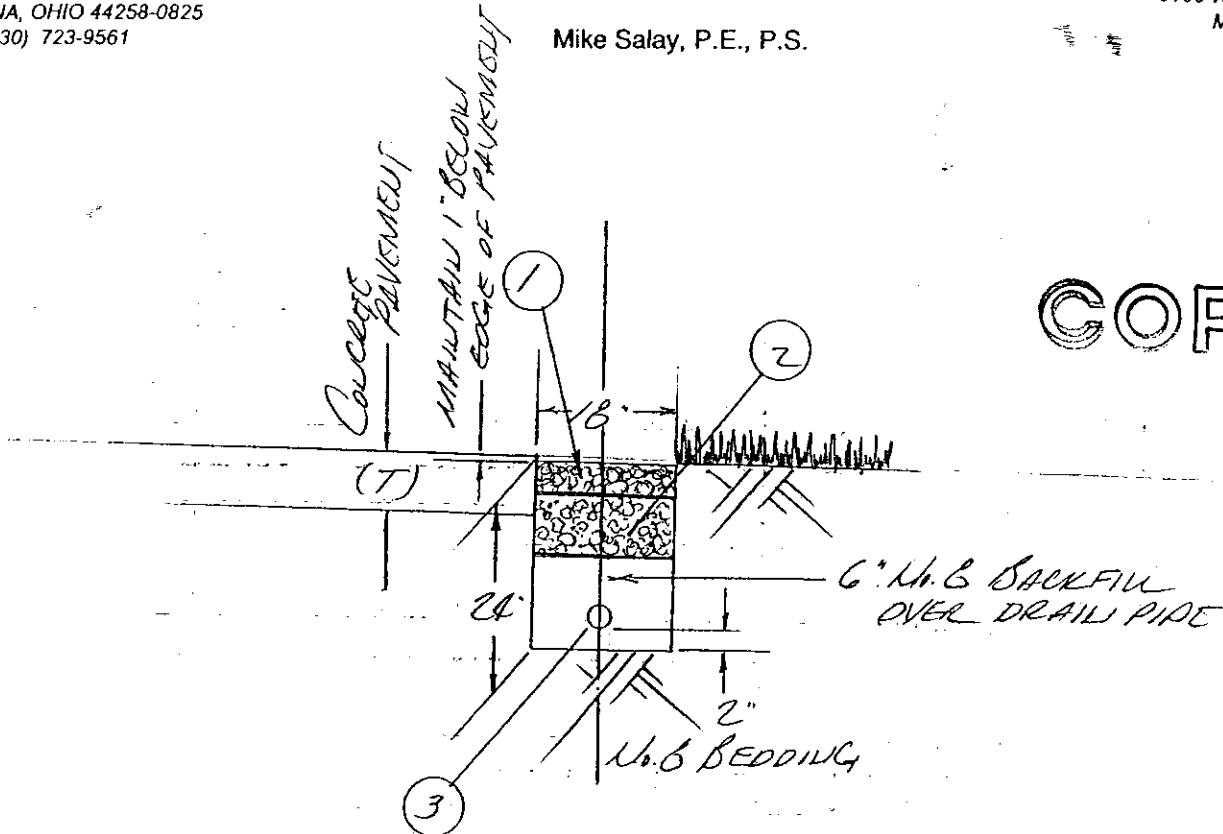

- ① 4" - U.S. 34 GRAVEL AGGREGATE
- ② 8" - U.S. 67/U.S. 57 LIMESTONE AGGREGATE
COMPACTED IN (2) 4" COURSES
- ③ 4" DIA. SLOTTED, SMOOTH-LINED, CORRUGATED
POLYETHYLENE (N-12) CONDUIT, OR EQUAL.

NOTE: DRAINS ARE TO OUTLET AT 500 FOOT MAXIMUM SPACINGS
AND SHALL CONNECT TO ROAD CULVERTS, STORM WATER
MANHOLES AND CATCH BASINS WITH A 6" DIAMETER ENTRY
CORE.

IF STRUCTURES ARE MORE THAN 500 FOOT APART, THE
DRAINS SHOULD OUTLET TO THE ROADSIDE DITCH, DITCH
ENCLOSURE PIPE OR DRAINAGE CHANNEL AS DIRECTED
BY THE ENGINEER OR HIS REPRESENTATIVE.

MEDINA COUNTY ENG'S OFFICE
8/2007